


S型传感器 / S Type Force Sensor

LFS-3A

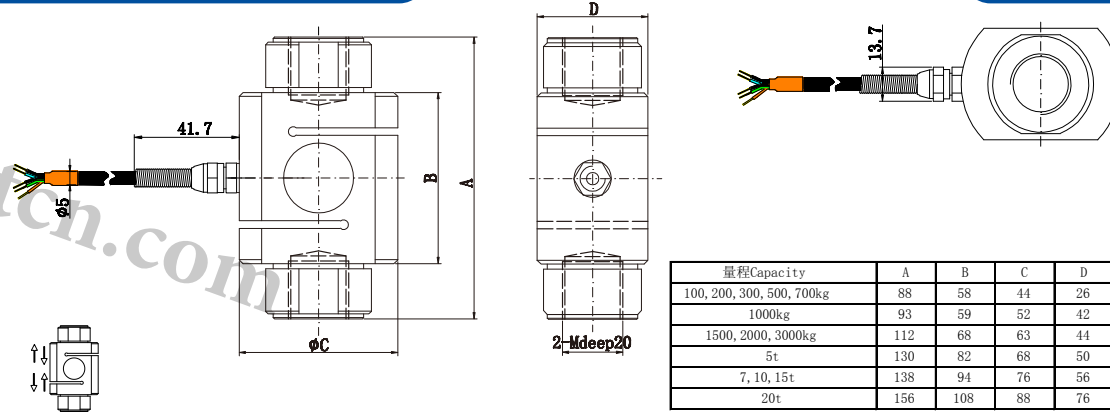

TECHNICAL SPECIFICATION

量程Capacity	A	B	C	D	M
100, 200, 300, 500, 700kg	88	58	44	26	M16*1.5
1000kg	93	59	52	42	M16*1.5
1500, 2000, 3000kg	112	68	63	44	M24
5t	130	82	68	50	M24
7, 10, 15t	138	94	76	56	M30
20t	156	108	88	76	M36

量程 Capacity	0 ~ 20t	材质 Material	合金钢/不锈钢 Alloy steel / Stainless Steel
输出灵敏度 Rated Output	2.0/ 3.0 ± 10% mV/V	输出阻抗 Output Impedance	350 ± 3 Ω
零点输出 Zero Balance	± 2% F.S.	绝缘电阻 Insulation	≥ 5000MΩ/100VDC
非线性 Non-linearity	0.05 % F.S.	使用电压 Recommended Excitation	5 - 10V
滞后 Hysteresis	0.05 % F.S.	最大使用电压 Maximum Excitation	15 V
重复性 Repeatability	0.05 % F.S.	温度补偿范围 Compensated Temp Range	- 10 ~ 60 °C
蠕变 (30分钟) Creep (30min)	0.05 % F.S.	工作温度范围 Operating Temp Range	- 20 ~ 80 °C
温度灵敏度漂移 Temp Effect on Output	0.05% F.S. / 10°C	安全超载 Safe Load Limit	150%
零点温度漂移 Temp Effect on Zero	0.05% F.S. / 10°C	极限超载 Ultimate Load Limit	200%
输入阻抗 Input Impedance	385 ± 5 Ω	电缆线尺寸 Cable Size	∅ 5 x 5m
电缆线连接方式 Wire Connection	Ex + : 红 Red; Ex - : 黑 Black; Sig + : 绿 Green (tension) ; Sig - : 白 White (拉为正, 压为负)		
主要应用 Applications	用于小力值试验机、料斗秤、吊钩秤、插拔力测试仪等拉压力测试仪器以及自动化设备领域和测试领域 Mainly applied in tension and compression testing instruments and automatic equipments fields, such as small range of force testing instruments, hopper scales, lifting hook scales, insertion force test instruments, and etc.		